

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



10/533532



(43) International Publication Date
13 May 2004 (13.05.2004)


PCT

(10) International Publication Number
WO 2004/039567 A1

- (51) International Patent Classification⁷: B29C 73/16 (74) Agent: PATRADE A/S: Fredens Torv 3A, DK-8000 Århus C (DK).
// 73/02, B60S 5/04
- (21) International Application Number: PCT/DK2003/000726
- (22) International Filing Date: 28 October 2003 (28.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
BA 2002 00340 31 October 2002 (31.10.2002) DK
- (71) Applicant (for all designated States except US): ACTIVE TOOLS A/S [DK/DK]; Møllerupvej 24, DK-8410 Rønde (DK).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LÆTGAARD, Thomas [DK/DK]; Banevænget 2B, DK-8700 Horsens (DK).
- (81) Designated States (national): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (81) Designated States (regional): ARIPO utility model (GH), ARIPO patent (GH), ARIPO utility model (GM), ARIPO patent (GM), ARIPO utility model (KE), ARIPO patent (KE), ARIPO utility model (LS), ARIPO patent (LS), ARIPO utility model (MW), ARIPO patent (MW), ARIPO utility model (MZ), ARIPO patent (MZ), ARIPO utility model (SD), ARIPO patent (SD), ARIPO utility model

[Continued on next page]

(54) Title: PUMP UNIT FOR VEHICLES

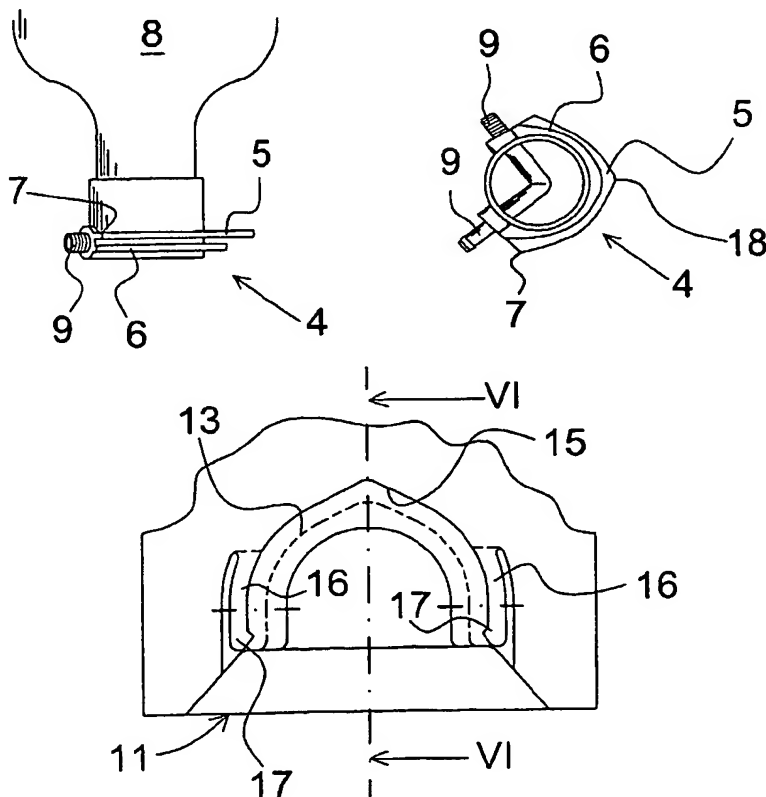

(57) Abstract: A pump unit for use in pumping and repairing car tyres has a box-like jacket (1) in which is provided a socket (10) for fixing a bottle (8) with repair fluid and with a lid/adaptor (4) known per se with a large and a small collar (5, 6). By the invention is provided securing of the adaptor (4) and thereby of the bottle (8) by providing the socket with two resilient arms (16) that may grip with projections (17) around the large collar (5) behind existing edges (7), thus forming a spring catch for the adaptor (4). Hence is provided secure holding of the adaptor (4) and ready insertion and removal of the bottle (8) in a simple way.



(SL), ARIPO patent (SL), ARIPO utility model (SZ), ARIPO patent (SZ), ARIPO utility model (TZ), ARIPO patent (TZ), ARIPO utility model (UG), ARIPO patent (UG), ARIPO utility model (ZM), ARIPO patent (ZM), ARIPO utility model (ZW), ARIPO patent (ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI,

SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

PUMP UNIT FOR VEHICLES

Background of the Invention

The present invention concerns a pump unit for vehicles designed with a side edge
5 along which there is provided a socket for holding in position a bottle containing a
repair fluid and provided with a lid with adapter with laterally projecting collar, where
the socket is adapted for receiving the collar by sideways insertion of the lid into the
socket.

10 The known pump units for vehicles are typically designed as flat boxes with rectangu-
lar shape and containing an air pump or compressor as well as valves etc. On the box
is made a cutout or similar that forms a socket for receiving the collar provided on the
neck of the bottle with repair fluid. The collar has to pipe stubs protruding in different
directions laterally of the neck, and thereby projecting away from the pump unit.

15 These stubs may be coupled to ends of hoses that are fastened in the pump unit and
which may conduct compressed air to the bottle and compressed air mixed with repair
fluid away from the bottle, respectively. The pump is used both for pumping tyres on
vehicles that have lost pressure and for repairing punctured tyres with the repair fluid
in the bottle.

20 By displacing the bottle and thereby the collar into the cutout or socket provided in the
pump unit, the bottle is held temporarily during use, possibly permanently in case of
permanent installation of the pump unit in the vehicle. A drawback of the known
pump units of this kind with such sockets is that the bottle is not secured very well and
25 is in danger of being jerked loose by jolts and vibrations during driving of the vehicle.

Summary of the Invention

This problem is solved by the peculiar feature that the socket includes two resilient
arms arranged to grip around the collar, as the arms are adapted to be displaced away
30 from each other at the insertion of the bottle into the socket, and that the arms are
adapted to engage the collar with snap action when the bottle is in its final position.

Due to the snap action, the arms may now hold the bottle in position as long as de-

sired. Furthermore, the bottle may easily be removed from the socket by just twisting it out of engagement of the arms. The arms may be designed in several ways, e.g. with shape like leaf springs that are fastened at both ends in the pump unit, and which curve towards each other between the ends. The arms may furthermore extend in parallel
5 with the collar in its direction of insertion, or they may extend perpendicularly to the collar.

However, it is preferred that the arms are secured in the socket by their first ends and are extending towards their second, free ends that point largely opposite to the direc-
10 tion of insertion of the bottle into the socket.

When the collar of the bottle does not have a round shape, but has two projections or edges that face opposite or laterally relative to the direction of insertion, it is preferred that the arms at each free end are provided with notches that are shaped and disposed
15 so as to engage corresponding projections on the collar.

In order to achieve a cheap and simple design it is furthermore preferred that the arms extend substantially along one side surface of the pump unit, and that the arms are moulded in one piece with the socket.
20

The Drawing

A preferred embodiment of the invention is described in more detail below with reference to the drawing, wherein:

- 25 Fig. 1 shows a pump unit according to the invention in perspective view,
Fig. 2-4 shows the top of a bottle with repair fluid with an adapter/lid provided with a collar as seen from the side of insertion, from the left on Fig. 2 and from below, respectively,
Fig. 5 shows an enlarged detail of the socket of the pump unit as seen from above,
30 and
Fig. 6 shows a section along the line VI-VI of Fig. 5.

Description of Examples of Embodiments

A pump unit according to the invention, e.g. for accessory for cars, as shown on Fig. 1 is shaped largely as a flat box 1 with a dial indicator 2 and operating button 3. Except for the inventive features described below, the arrangement and function of the unit are known per se.

A bottle 8 with repair fluid is provided with a special lid with adapter 4 having a large collar 5 and a small collar 6 which is disposed in parallel with the large collar 5. The adapter 4 is known per se and has previously been used in prior art pump units that have a socket for the adapter 4 only consisting of a cutout in the side edge of the unit, where the collars 5 and 6 were able to get in and 'grip' around the plate material that constitutes the outer box-like jacket on the unit. However, the bottle is not secured and may fall out, e.g. by jolting occurring during driving.

As the large collar 5 has two opposite and almost lateral projections 7, the latter are utilised for holding the adapter 4 and thereby the bottle with repair fluid 8. In the adapter 4 is provided two stubs 9 for supply and discharge of air and repair fluid.







Holding the adapter 4 with bottle 8 in correct position of use is achieved by shaping the socket 10 as shown on Figs. 5 and 6. In normal position of use of the pump unit, a largely plane, horizontal bottom 12 extends from a vertical side edge 11 on the unit 1 to a lower, vertical rear wall 13 which, as shown on Fig. 5, has a curved shape. The rear wall 13 is limited upwards by a plane and almost semi-circular collar 14 that extends towards the centre of the socket 10. The top side of the collar 14 extends flatly towards an upper rear wall 15 that has the same or approximately the same shape as the large collar 5, i.e. pointed shape. Along opposite sides at the rear wall 15, two resilient arms 16 are formed, both extending against the side edge 11. At their extreme, free ends, the arms 16 have projections 17 facing each other and disposed so that they may engage the collar 5 behind the projections 7.

During use, the adapter 4 with mounted bottle 8 is pushed laterally with the pointed end 18 of the large collar 5 into the socket 10. Thereby, the arms 16 are pushed away from each other until the projections 17 engage behind the projections 7 on the collar

5. Simultaneously, the small collar 6 goes in under the collar 14 of the socket, so that the bottle 8 cannot tilt out of engagement with the arms 16 and the socket 10. In that way, a secure snap action is established for holding the bottle 8 in position, while at the same time facilitating removal the bottle 8 again, as the projections 17 are inclining also at their sides facing the rear wall 15.

CLAIMS

1. Pump unit for vehicles designed with a side edge along which there is provided a socket for holding in position a bottle containing a repair fluid and provided with a lid
5 with laterally projecting collar, where the socket is adapted for receiving the collar by sideways insertion of the lid into the socket, **characterised in that** the socket includes two resilient arms arranged to grip around the collar, as the arms are adapted to be displaced away from each other at the insertion of the bottle into the socket, and that the arms are adapted to engage the collar with snap action when the bottle is in its final
10 position.
2. Pump unit according to claim 1, **characterised in that** the arms are secured in the socket by their first ends and are extending towards their second, free ends that point largely opposite to the direction of insertion of the bottle into the socket.
15
3. Pump unit according to claim 1 or 2, **characterised in that** the arms at each free end are provided with notches that are shaped and disposed so as to engage corresponding projections on the collar.
- 20 4. Pump unit according to any preceding claim, **characterised in that** the arms extend substantially along one side surface of the pump unit and that the arms are moulded in one piece with the socket.

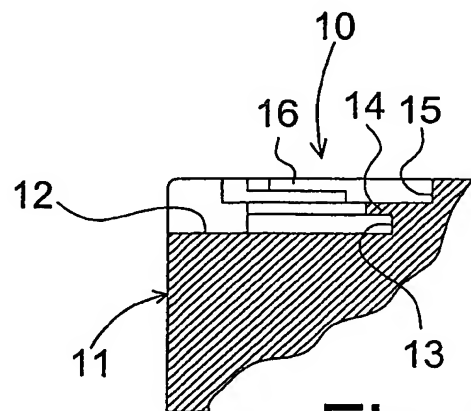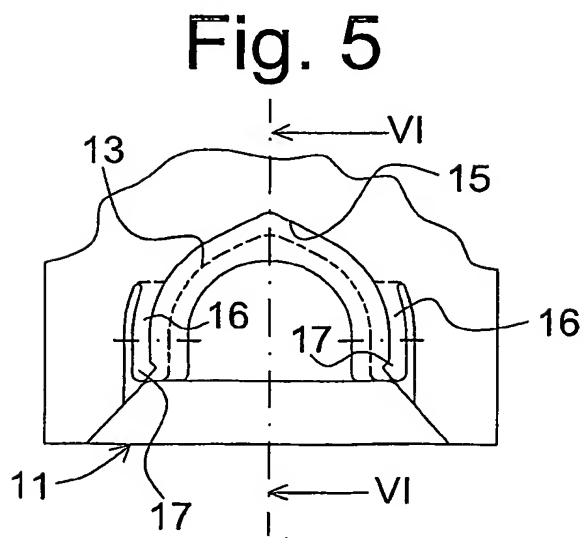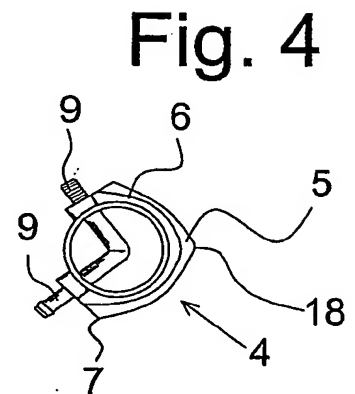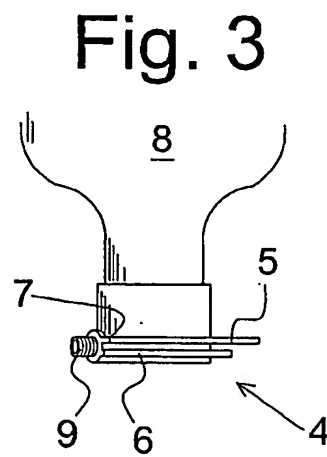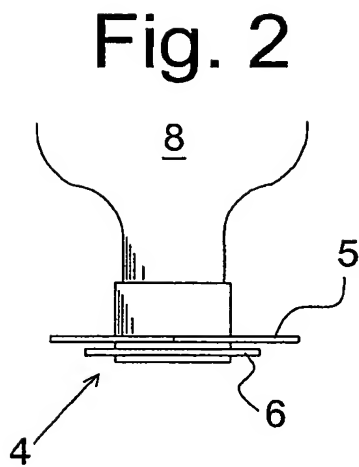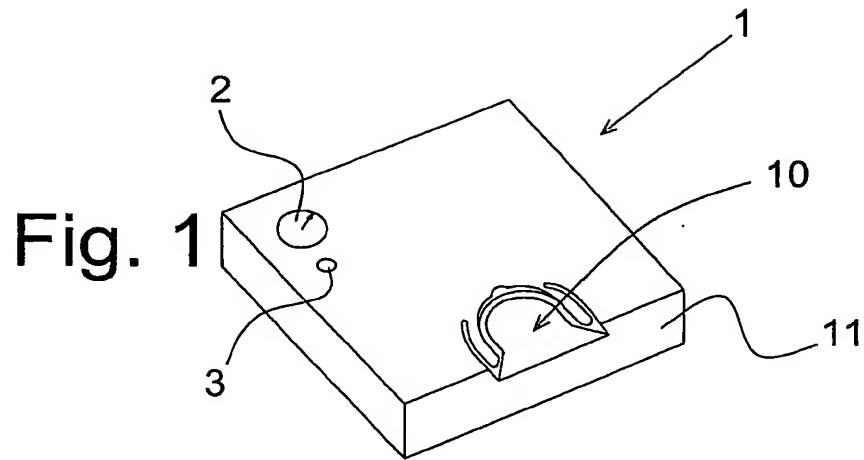

INTERNATIONAL SEARCH REPORT

Intern. Application No
PCT/DK 03/00726

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 B29C73/16 //B29C73/02, B60S5/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 B29C B60S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 765 367 A (SCOTT MARK E) 23 August 1988 (1988-08-23) the whole document ---	1
A	DE 101 06 468 A (STEHLE MICHAEL) 14 August 2002 (2002-08-14) the whole document ---	1
A	DE 198 46 451 A (SUMITOMO RUBBER IND) 13 April 2000 (2000-04-13) the whole document -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

23 January 2004

Date of mailing of the international search report

10. 02. 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

SUNE SÖDERLING/JAA

INTERNATIONAL SEARCH REPORT

Information on patent family members

Intern. Application No
PCT/DK 03/00726

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4765367	A	23-08-1988	NONE	
DE 10106468	A	14-08-2002	DE 10106468 A1	14-08-2002
DE 19846451	A	13-04-2000	DE 19846451 A1	13-04-2000
			AU 755070 B2	05-12-2002
			AU 5983099 A	01-05-2000
			CA 2347421 A1	20-04-2000
			WO 0021875 A1	20-04-2000
			EP 1121324 A1	08-08-2001
			JP 2000108215 A	18-04-2000
			ZA 200102867 A	07-06-2002